

09-13-00

A

09/12/00
JCE872 U.S. PTO

PATENT APPLICATION

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

UTILITY PATENT APPLICATION TRANSMITTAL LETTER

JCE41 U.S. PTO
09/660112
09/12/00

Atty./Agent Docket No.: CE03978R

Mailing Date: September 12, 2000

Express Mail Label No.: EK414665240US

Assistant Commissioner for Patents
Box Patent Application
Washington, D.C. 20231

Dear Sir:

Transmitted herewith for filing under 37 CFR 1.53 (b) is a Nonprovisional Utility Patent Application:

☒ New Application; or

☐ Continuation; or ☐ Divisional, or ☐ Continuation-in-Part (CIP) Application of prior US application No. _____, filed on _____, having US Examiner _____, in Group Art Unit _____ of _____

Inventor(s): Hyziak et al.

For (Title): Method for Reducing Analog Facsimile Call Duration Over CDMA

This transmittal letter has 2 total pages.

Enclosed are:

☒ 3 sheets of drawings, along with 20 pages of specification, claims, and abstract.☒ Oath or Declaration Combined with Power of Attorney (4 pages)☒ Newly Executed (original or copy)☐ Copy from a prior application (if this is a Continuation/Division with no new matter)

☐ Statement deleting named inventor(s) in prior application if this is a Continuation/Division (See 37 CFR 1.63(d)(2) and 1.33(b).)

☐ Consider as the above Statement, Please delete as inventors for this application the following inventors named in the prior application: _____

☐ Foreign priority to _____ Patent application having serial number _____, and a filing date of _____ is hereby claimed under 35 USC 119.

☐ A copy of the priority document is included herewith.☒ An Assignment Transmittal Letter and Assignment of the invention to MOTOROLA, INC.☐ An Information Disclosure Statement (IDS), with _____ PTO-1449, and _____ citation copies.

☐ Petition For Extension of Time for parent application of the present Continuation/Division/CIP application

☒ Print EFS Inventor Information Sheet(s).

09/12/00 09:12:00

☒ Return Receipt Postcard

☐ Preliminary Amendment

☐ Please cancel filed claims _____.

☐ Incorporation by Reference (for Continuation/Division application) The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.

☐ Since the present application is based on a prior US application, please amend the specification by adding the following sentence before the first sentence of the specification: "The present application is based on prior US application No. _____, filed on _____, which is hereby incorporated by reference, and priority thereto for common subject matter is hereby claimed."

☒ The filing fee is calculated as follows:

CLAIMS AS FILED, LESS ANY CANCELED BY AMENDMENT

	NUMBER OF CLAIMS	NUMBER EXTRA	RATE	FEE
TOTAL CLAIMS	12 - 20 =	0	X \$18	= \$.00
INDEPENDENT CLAIMS	2 - 3 =	0	X \$78	= \$.00
MULTIPLE DEPENDENT CLAIMS			\$260	= \$ 0.00
BASIC FEE				=\$ 690.00
TOTAL FILING FEE				=\$ 690.00

☒ Please charge Deposit Account No. 13-4772 in the amount of \$ 690.00 for the Total Filing Fee.


☒ The Commissioner is hereby authorized to charge any additional fees which may be required now or in the future under 37 CFR 1.16 or 37 CFR 1.17, including any present or future time extension fees which may be required, or credit any overpayment to Deposit Account No. 13-4772

☒ One additional copy of this sheet is enclosed

Please forward all correspondence to:

Customer Number **22917**

By: _____


Kenneth A. Haas
Attorney for Applicant(s)
Registration No. 42,614
MOTOROLA, INC.
Phone: (847) 576-0379
Fax: (847) 576-3750

JCE41 U.S. PTO
09/660112
09/12/00

INVENTOR INFORMATION

Inventor One Given Name:: Janusz
Family Name:: Hyziak
Postal Address Line One:: 9352 Margail
City:: Des Plaines
State or Province:: IL
Country:: USA
Postal or Zip Code:: 60016
City of Residence:: Des Plaines
State or Province of Residence:: IL
Country of Residence:: USA
Citizenship Country:: USA
Inventor Two Given Name:: Saurabh
Family Name:: Rastogi
Postal Address Line One:: 39 Ankur Apartments, 7
City:: Patpar Ganj
State or Province:: Delhi
Country:: India
Postal or Zip Code:: 110092
City of Residence:: Patpar Ganj
State or Province of Residence:: Delhi
Country of Residence:: India
Citizenship Country:: India
Inventor Three Given Name:: Scott
Family Name:: Finkle
Postal Address Line One:: 1345 Meyer Road
City:: Hoffman Estates
State or Province:: IL
Country:: USA
Postal or Zip Code:: 60194
City of Residence:: Hoffman Estates
State or Province of Residence:: IL
Country of Residence:: USA
Citizenship Country:: USA

CORRESPONDENCE INFORMATION

Correspondence Customer Number:: 22917
Fax One:: (847) 576-0379

APPLICATION INFORMATION

Title Line One:: Method for Reducing Analog Facsimile Cal
Title Line Two:: 1 Duration Over CDMA
Total Drawing Sheets:: 3
Formal Drawings?: Yes
Application Type:: Utility
Docket Number:: CE03978R

Secrecy Order in Parent Appl.?:: No

REPRESENTATIVE INFORMATION

Representative Customer Number:: 22917

Source:: PrintEFS Version 1.0.1

2025-10-27 10:10:10

METHOD FOR REDUCING ANALOG FACSIMILE CALL DURATION OVER CDMA

FIELD OF THE INVENTION

5 This invention relates to wireless communication systems. In particular, this invention relates to a method for reducing the time required to complete an analog facsimile transmission over a CDMA cellular telephone system.

BACKGROUND OF THE INVENTION

10 Cellular telephone systems are well known. In many parts of the world, including the United States, cellular systems now provide two-way telecommunications capability that is regularly provided elsewhere by land-line telephone systems. In addition to voice communications, cellular telephone systems also carry facsimile message traffic.

15 In a fax transmission, a page of a document is optically scanned to produce electronic signals representative of the page's image. The signals are transferred across a switching network to another fax machine whereat the electronic signals from the first fax machine are processed to reproduce a near-perfect likeness of the document page that was optically scanned by the fax machine at the sending end.

20 Fax transmission in the U.S. and elsewhere comply with the International Telecommunications Union (ITU) standard no. ITU-T.30. ITU standards are readily available from the ITU web site at *www.itu.org*.

 A problem with sending a fax transmission via a CDMA wireless network is that most fax transmissions are indeed analog signals comprised of tones that

represent the images on a page being copied and transmitted. Stated alternatively, fax transmissions on a wireline communications system comply with T.30; fax transmissions on a wireless CDMA system comply with a different standard known as the I707 standard for CDMA cellular systems, which is a digital system.

- 5 Accordingly, when transmitting a fax over CDMA, the analog ITU-T.30 fax protocol must be converted during the transmission process to a digital standard or protocol by which the analog fax signals can be carried over a digital cellular transport. Transmitting an analog fax over a CDMA cellular system also requires that certain control messages sent between the fax machines be completely
- 10 assembled at the CDMA gateways, thereby increasing the time required to complete a fax transmission.

A method of reducing an analog fax transmission over a CDMA cellular system would be an improvement over the prior art.

SUMMARY OF THE INVENTION

- 15 There is provided a method for reducing the time required to transmit an analog fax over a CDMA cellular system. Analog facsimile protocols are well defined in the International Telecommunications Union Standard T.30. This standard prescribes how an analog fax machine is to communicate with another ITU-T.30-compliant fax machine via standard telephone lines. The T.30 standard
- 20 requires the transmission of a preamble message prior to the transmission of certain fax control signals.

Improved synchronization and reduced transmission time is achieved by detecting the beginning of an ITU-T.30 preamble message at the entry point of a

CDMA cellular system. Instead of waiting for the complete reception of a preamble message and the subsequent control messages, upon the detection of an ITU T.30 preamble, the CDMA terminal equipment generates a new, preamble message indicator or "PMI" that can be sent across the CDMA network on a high-speed data link and which indicates to the cellular network that a T.30 preamble message has been detected by the CDMA system. Upon detecting the PMI at the exit point of the CDMA cellular system, the CDMA infrastructure equipment (and without waiting for subsequent control messages following the preamble to be received) re-generates a new T.30 preamble that is sent to the analog fax machine coupled to a CDMA cellular system, for a mobile-to-land call. End-to-end transmission time is reduced by eliminating the need to completely receive a T.30 preamble message and subsequent control messages before starting the preamble at the message destination.

SUMMARY OF THE DRAWINGS

Figure 1 is a simplified block diagram of a portion of a cellular communication network by which an analog facsimile transmission is enabled over a CDMA cellular network.

Figure 2 shows a simplified flow diagram of the prior art message sequence timing of an ITU T.30-compliant fax transmission over a CDMA network.

Figure 3 shows a simplified flow diagram of the ITU T.30-compliant message sequence timing of the invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

An advantage of the invention over the prior art is reduced facsimile transmission time. In order to appreciate message sequence time, the network over which a facsimile transmission is carried is shown in Figure 1, which is a
5 simplified block diagram of a communication system 100 by which an analog facsimile transmission is carried over a wireless CDMA communications system.

An ITU-T.30-compliant analog fax machine 102 is coupled to a wireless CDMA telephone set 104, which is frequently referred to as a fixed wireless terminal. The CDMA fixed wireless terminal 104 communicates with a CDMA
10 cellular telephone network infrastructure using CDMA (insert) modulation, which is not germane to an understanding of the invention and therefore not shown but otherwise known to those skilled in the art. The infrastructure 106 detects and decodes the CDMA modulation and routes the call through a switching system or through other infrastructure equipment 108 to another ITU-T.30-compliant analog
15 fax machine 110 (the receiving fax machine).

Figure 2 shows a flow diagram 200 of the messages exchanged in an ITU-T.30-compliant fax transmission over a CDMA network using prior art techniques.

In Figure 2, the vertical line 202 on the left side of the drawing (and which
20 is labeled "MOBILE") identifies the logical boundary of the combination of an analog fax machine and CDMA fixed wireless terminal 102, 104 depicted in Figure 1. Depending upon the orientation of the lines and arrowheads, the solid and broken lines intersecting the vertical "MOBILE" line 202 represent signals

that are sent to or from the combination of the wireless terminal / analog fax machine from which a document is to be sent (i.e. the sending fax) to another analog fax machine 110 that is referred to herein as the receiving or land-line fax, represented by the vertical line 204 on the extreme right-hand side of Figure 2

5 drawing under heading "LAND LINE FAX."

Between these two fax machine lines 202, 204 are two vertical lines labeled "TX" 206 and "RX" 208 which represent the entry and exit points (or boundaries) of the CDMA wireless system. The "TX" line 206 denotes the entry point of the CDMA system for the sending fax machine. Signals to and from the sending fax machine, as represented by the various inclined line segments, are
10 with respect to the TX end of the CDMA system. The "RX" line 208 denotes the entry point of the CDMA system for the receiving fax machine 110. Signals to and from the receiving fax 110 are with respect to the RX end of the CDMA system.

15 Signal timing is shown by way of the intersection of the inclined line segments with the vertically-oriented lines demarked as TX, RX, etc.

As shown in the flow diagram of Figure 2, (which is an exemplary message sequence of a single ITU-T.30 mobile-to-land fax call and therefore not necessarily representative of the timing of all such calls, the timing of which will
20 vary according to image content, fax machine specifications by manufacturer and RF conditions) several different messages are exchanged before an image is actually transmitted. The signaling that is exchanged between two fax machines is specified in the ITU T.30 standard.

At time T_0 , the receiving fax machine (identified in Figure 1 by reference numeral 110) has just answered an incoming call (placed by the sending end fax machine that is identified by reference numeral 102 in Figure 1). 2.2 seconds later, the receiving fax completes sending a T.30-compliant preamble 210

5 followed by the T.30 NSF, CSI and DIS messages 212 to the CDMA infrastructure RX boundary. These messages are always preceded by a preamble message 210, which is typically several bytes in length.

(The "CSI" message is the Called Subscriber Id, that is sent by the answering fax machine to identify itself. The "DIS" message is the Digital Id
10 Signal, and is sent by answering fax machine specifying its capabilities, including communication speeds, paper size, and resolution. "NSF" refers to the Non-Standard Facilities message that is sent by answering device, conveying any proprietary information for two compatible devices to improve transmission.)

After the CDMA RX infrastructure equipment (at line 208) receives the
15 NSF, CSI and DIS messages 212 from the receiving fax 110, the messages are sent across the CDMA system to the TX end of the link (at line 206) which requires about 0.1 seconds of time. Accordingly, 2.3 seconds after the RX end (at line 208) of the CDMA network detected that the receiving machine answered the call, the TX end (at line 206) of the CDMA infrastructure has received the CSI
20 and DIS messages 212, (the NSF message is dropped at the RX terminal equipment at line 208) which are then passed along to the sending fax machine 102.

2.2 seconds after the TX end (at line 206) of the CDMA network sends the CSI and DIS messages 212, the sending fax 102 sends its own TSI and DCS messages 214, to the TX end (at line 206) of the CDMA network following a message preamble 216. (The “TSI” message is the Transmitting Subscriber Id data sent by originating fax. DCS or Digital Command Signal, also sent by originating fax machine, conveys any parameters that were up to that point negotiated by the two machines.)

TSI and DCS messages 214 from the sending fax 102 at the RX end (at line 208) traverse the CDMA network asynchronously with respect to the RX time, but are nevertheless expected by the receiving fax 110. During the 5.2 seconds after the receiving fax machine 110 first answered, it expected a response to its first transmission of its NSF, CSI and DIS messages 212. The unanswered transmission of NSF, CSI and DIS messages 212 precipitates a retransmission of these messages 218 by the receiving fax machine.

An inspection of the messages received at the RX end (at line 208) of the CDMA system approximately 6.8 seconds into the call reveals that while the RX end is receiving the TSI and DCS messages 214, the receiving fax 110 is trying to re-send new NSF, CSI and DIS messages 218, resulting in a message collision at the RX end (at line 208) of the CDMA network. Approximately 0.5 seconds after the TSI and DCS messages 214 were first received at the RX end (at line 208), the TSI and DCS messages 214 are forwarded to the receiving fax 110 by the CDMA infrastructure.

As the TSI and DCS messages 214 are making their way across the CDMA network to the receiving fax machine 110, the sending fax machine 102 begins to send a synchronization training messages "TCF" 220. At the RX end (at line 208) TCF 220 is sent to the landline fax, thereby causing the receiving fax
5 110 to send a preamble 222 followed by the CFR signal 224 (confirmation to send— sent by receiving fax machine to indicate that the training TCF sequence was received properly) approximately 11.5 seconds after the call was first answered.

Approximately 0.2 seconds after the CFR 224 is sent from the RX end (at
10 line 206), it is received at the TX end (at line 208), 224 and sent to the sending fax 102, 224. Because the sending fax 102 expected a response to its first transmission of TSI, DCS and TCF 214 and 220 but a response was not received, the sending fax re-sends the TSI and DCS messages 228, following a preamble 226, which is in turn followed by another TCF message 230, all while the CFR
15 signal 224 is crossing the CDMA network boundary at line 206.

After resolving the signal collisions within the CDMA TX-side equipment, approximately 16.8 seconds into the call, the CFR 224 has been sent to the sending fax machine from the TX end of the CDMA network (at line 206 to line 202). 1.5 seconds later, image data 232 from the sending fax machine 102 (at line
20 202) is received at the TX terminal (at line 206) of the CDMA network whereupon image data 232 is sent across the CDMA network, lasting about 58 seconds for the example shown in Figure 2. (Transmission time of an image is highly variable, depending upon image content.)

77.7 seconds into the call, the TX end of the CDMA network receives an EOP 234 (end of procedure, indicating data transmission has concluded) following another preamble 236. Approximately 2.0 seconds later the RX end (at line 208) of the CDMA network receives the EOP 234 at line 208 and forwards the EOP 234 to the receiving fax 110 at line 204. 1.3 second later, i.e. 81 seconds into the call, RX receives a MCF (message confirmation) 240 following a preamble 238. The MCF 240 is sent through the CDMA network to the TX end (at line 206). Because the MCF 240 was not promptly received, the sending fax 102 re-sends the EOP message 242 following a preamble 244, which collides with the MCF message 240 at the TX end (at line 206) of the CDMA network. Approximately 83.6 seconds into the call, the TX end of the CDMA system has sorted out the message collisions and forwarded to the sending fax 102, the MCF message 244, which is then followed by the DCN message 246, closing the link between the two fax machines.

Those skilled in the art will recognize that the various ITU T.30 control messages exchanged between the fax machines are, with few exceptions, preceded by preamble message blocks. In the prior art, the message preamble and the message data must be received and decoded before further transmission takes place. A significant transmission time savings can be realized if the CDMA infrastructure is capable of recognizing a T.30 message preamble and immediately sending instead, a preamble message indicator or "PMI" over a high-speed data link. Stated alternatively, when an ITU T.30 preamble message from either fax machine is detected at the CDMA system boundaries, the CDMA system sends a

preamble message indicator via a high speed data link, without waiting for the complete preamble or the message content to be received. In the invention, a T.30 message preamble is recognized by the well-known format of a T.30 preamble. In the preferred embodiment, recognizing as few as four or five bytes out of a 36-40 byte preamble can form the basis of a decision that an incoming message is a preamble. In the preferred embodiment, the number of bytes that are tested for conformance to the T.30 preamble format is variable so that depending upon channel noise or other signal characteristics, a decision of whether a stream of bytes is a preamble can be adjusted appropriately.

10 Analog facsimile transmission time reduction via a CDMA cellular system is more fully appreciated upon inspection of Figure 3, which depicts the timing improvement realized by using a CDMA system-generated PMI message.

With respect to Figure 3, which depicts the message timing of a single, exemplary fax call via a CDMA system using a system-generated PMI, at time T_0 the RX side of the CDMA system detects the receiving fax machine's transmission of a preamble 301 that precedes the CSI and DIS messages 304. When the preamble 301 is detected, (which is preferably achieved by the CDMA infrastructure equipment by recognizing only a few bytes of a preamble message using pattern recognition) the CDMA system at the RX end (at line 208) immediately sends a PMI 302 (preamble message indicator, which is a message that is shorter in time (or possibly byte count or length) than a T.30 preamble) to the TX side of the CDMA system via a high-speed data link (not shown) precluding the necessity of having the TX side equipment wait until the preamble

301 and the following CSI and DIS messages 304 are completely received at the RX end (at line 208).

Having received only the PMI 302, CDMA network TX equipment recreates the multi-byte T.30 preamble 305, which under the ITU standard,
5 precedes the CSI and DIS messages 306 sent from the TX end (at line 206) to the mobile fax (at line 202) so that as these messages are received at the TX side 206, the CSI and DIS messages 306 can be forwarded soon after to the mobile fax terminal, i.e. the sending fax machine 102. In the example shown in Figure 3, approximately 2.1 seconds of time can be realized over the example shown in
10 Figure 2 by sending the PMI via high speed link.

After the sending fax 102 receives the CSI and DIS messages 306, the sending fax 102 will respond with a preamble 309 and its TSI and DCS messages 310. When the TX side of the CDMA network first detects the preamble 309 from the sending fax machine 102, the TX side of the CDMA system generates a
15 PMI message 308 that is sent to the RX side (at line 208) of the CDMA system via a high-speed data link RF connection between the RX and TX ends 206 and 208.

As described above, when the RX side of the CDMA system receives the PMI 308 from the TX side of the CDMA system, the RX equipment of the CDMA system re-creates a multi-byte T.30 preamble 311 which is followed by
20 the TSI and DCS messages 310 that were generated by the sending fax machine 102 in response to the receiving fax machines CSI and DIS messages 306. As shown in Figure 3, the TSI and DCS messages 310 are received at the RX side of the CDMA system and sent to the receiving fax machine 4.6 seconds after the

receiving fax machine 110 first starting sending a preamble 301, whereas the prior art system required substantially a minimum of 7.4 seconds.

After the receiving fax machine receives the TSI and DCS messages 310, followed by TCF 312, the receiving fax machine 110 generates a preamble 314 followed by a CFR message 316. When the RX equipment (at line 208) of the CDMA system detects the preamble 314 ahead of the CFR message 316, another PMI 318 is generated by the RX equipment (at line 208) that is forwarded to the TX side. 1.3 seconds after the RX side of the CDMA system sends the PMI 318, the receiving fax machine's CFR message 316 is sent to the TX side of the CDMA system. Inasmuch as the TX side already received the PMI 318, the TX side re-creates a T.30 message preamble 320, which is followed by the CFR message 316 sent from the TX side (at line 206). Upon receipt of the CFR message 316 from the TX side, the sending fax machine 102 begins sending image data 322, approximately 9.5 seconds after the receiving fax machine 110 first started sending its first preamble 301 at time T_0 . By preemptively sending preamble message indicators 302, 308, 318, 330 instead of actual preambles, and by sending the PMI over a high-speed link, a significant amount of time can be saved in an analog facsimile call. The prior art methodology required as much as 18.5 seconds to begin sending image data, which in the example shown, takes 58 seconds.

Upon the conclusion of the image data transmission 324, the sending fax machine 102 will send an EOP message 326, which is also preceded by a preamble 328. Instead of the preamble 328, the TX CDMA equipment (at line

206) sends a PMI 330. When this PMI 330 is received at the RX side of the CDMA system (at line 208), the CDMA system re-creates the multi-byte T.30 message preamble 332 to be sent to the receiving fax machine ahead of the EOP 326. As shown in Figure 3, the EOP 326 is sent to the receiving fax machine 110 approximately 70.9 seconds after T_0 .

As before, upon receipt of the EOP 326, the receiving fax 110 issues an MCF message 334 preceded by a preamble 336. Using the same methodology, a PMI 338 sent in place of an actual T.30 preamble allows the CDMA system to re-create a preamble 340 at the TX side followed immediately by the MCF message 334.

At least one alternate embodiment of the invention will include error handling. In the case wherein a T.30 message preamble is received at a CDMA terminal, but the subsequent control messages are missing or corrupted, the CDMA terminal can optionally terminate the preamble message transmission thereby reducing time that would otherwise be wasted waiting for the preamble message to be fully received by the recipient fax machine. In yet another embodiment, the preamble message itself might be corrupted in which case a data terminal that detects a corrupted preamble can send an error message (PR-TERM_P message) to a subsequent data terminal upon detecting that the message preamble was corrupted, after which a remote terminal can cease to generate the message preamble signal and terminate the preamble+message sequence. In yet another embodiment, at the receiving fax end, after receiving a preamble message indicator, the T.30 preamble message is re-generated. If after some empirically-

By using a high-speed PMI instead of sending the actual preamble
messages the time required to send an analog fax across a CDMA network can be
reduced to approximately 73 seconds where the prior art method required at least
83.6 seconds.

We claim:

1. A method of reducing facsimile transmission duration on a CDMA cellular communications network comprising:

5 detecting at a first CDMA cellular terminal coupled to a first analog fax machine, a first multi-byte message preamble that identifies the first element of a sequence in a facsimile control message transmission;

10 sending from said first CDMA cellular terminal to a second CDMA cellular terminal coupled to a second analog fax machine, a preamble message indicator, said preamble message indicator signaling to said second CDMA cellular network terminal the beginning of an analog facsimile control message transmission;

15 at the second CDMA cellular terminal, re-generating said first multibyte message preamble to said second analog fax machine upon the receipt of said preamble message indicator.

2. The method of claim 1 further comprising the steps of:

20 sending an analog facsimile control message from said first CDMA cellular terminal to said second CDMA cellular terminal after said reduced duration preamble indicator message is sent by said first CDMA cellular terminal;

 at the second CDMA cellular terminal, sending said analog facsimile control message to said second analog fax machine.

3. The method of claim 1 wherein the step of detecting said message preamble at said first CDMA cellular terminal includes collecting a pattern of bytes for the duration of only a portion of said multi-byte message preamble.
- 5 4. The method of claim 1 further including the step of: detecting at said first data terminal that data following said message preamble early detection interval is defective; and sending a first error message to said second data terminal upon detecting that said message preamble was corrupt, after which the remote terminal may cease to generate the message preamble signal and terminate the
10 preamble+message sequence.
5. The method of claim 1 further including the step of: detecting at said first data terminal that the message following said message preamble is defective; and sending a first error message to said second data terminal upon detecting that
15 said subsequent message was corrupt.
6. The method of claim 1 further including the step of: at the remote end, upon starting the preamble signal to the fax machine, detecting a communications error when the intended subsequent message was not received; and thereafter
20 terminating said preamble message at the remote data terminal.
7. The method of claim 1 wherein said step of: detecting a first multi-byte message is comprised of the steps of:

receiving at a wireless CDMA terminal, an ITU-T.30 control message;

detecting, by said wireless CDMA terminal, a predetermined data sequence of a facsimile transmission message preamble ITU-T.30 format.

5

8. The method of claim 3 wherein the number of bytes of said multi-byte message preamble that are detected is variable.

10 9. The method of claim 1 further including the step of: at the second CDMA network terminal, upon receipt of a preamble signal indicator, detecting a communications error when the intended subsequent message was not received; thereafter terminating the multi-byte message preamble re-generated at the second CDMA cellular network.

15

10. The method of claim 1 wherein said step of: detecting the beginning of a facsimile transmission message preamble is comprised of the steps of:

receiving at a wireless CDMA communications terminal, an ITU-T.30 control message;

20

detecting by said CDMA communications terminal, a predetermined data sequence of a facsimile transmission message preamble in said ITU-T.30 control message.

5

upon the detection of a beginning facsimile transmission message in said ITU-T.30 control message, sending to said distant second data terminal, a reduced duration preamble message indicator (PMI) indicating to said distant second data terminal the future receipt of a facsimile transmission message in said ITU-T.30 message sequence.

12. An apparatus for reducing facsimile transmission duration on a CDMA communications network comprising:

5 a first CDMA data terminal that detects a transmission message preamble identifying the beginning of an ITU T.30-compliant facsimile transmission message from a first analog fax machine, and which thereafter sends to a distant second CDMA data terminal, a reduced duration preamble indicator (PMI) message that signals to a second data terminal the beginning of a T.30 facsimile transmission;

10 a second CDMA data terminal that is capable of detecting said reduced duration preamble indicator message and in response thereto, initiating a T.30 preamble transmission to a second analog fax machine.


15

ABSTRACT OF THE DISCLOSURE

5 Analog facsimile transmission message time can be significantly reduced over a CDMA network by preemptively sending a preamble message indicator (PMI) without waiting for the accumulation of entire preamble or messages that follow ITU T.30 preamble messages.

[illegible]

L

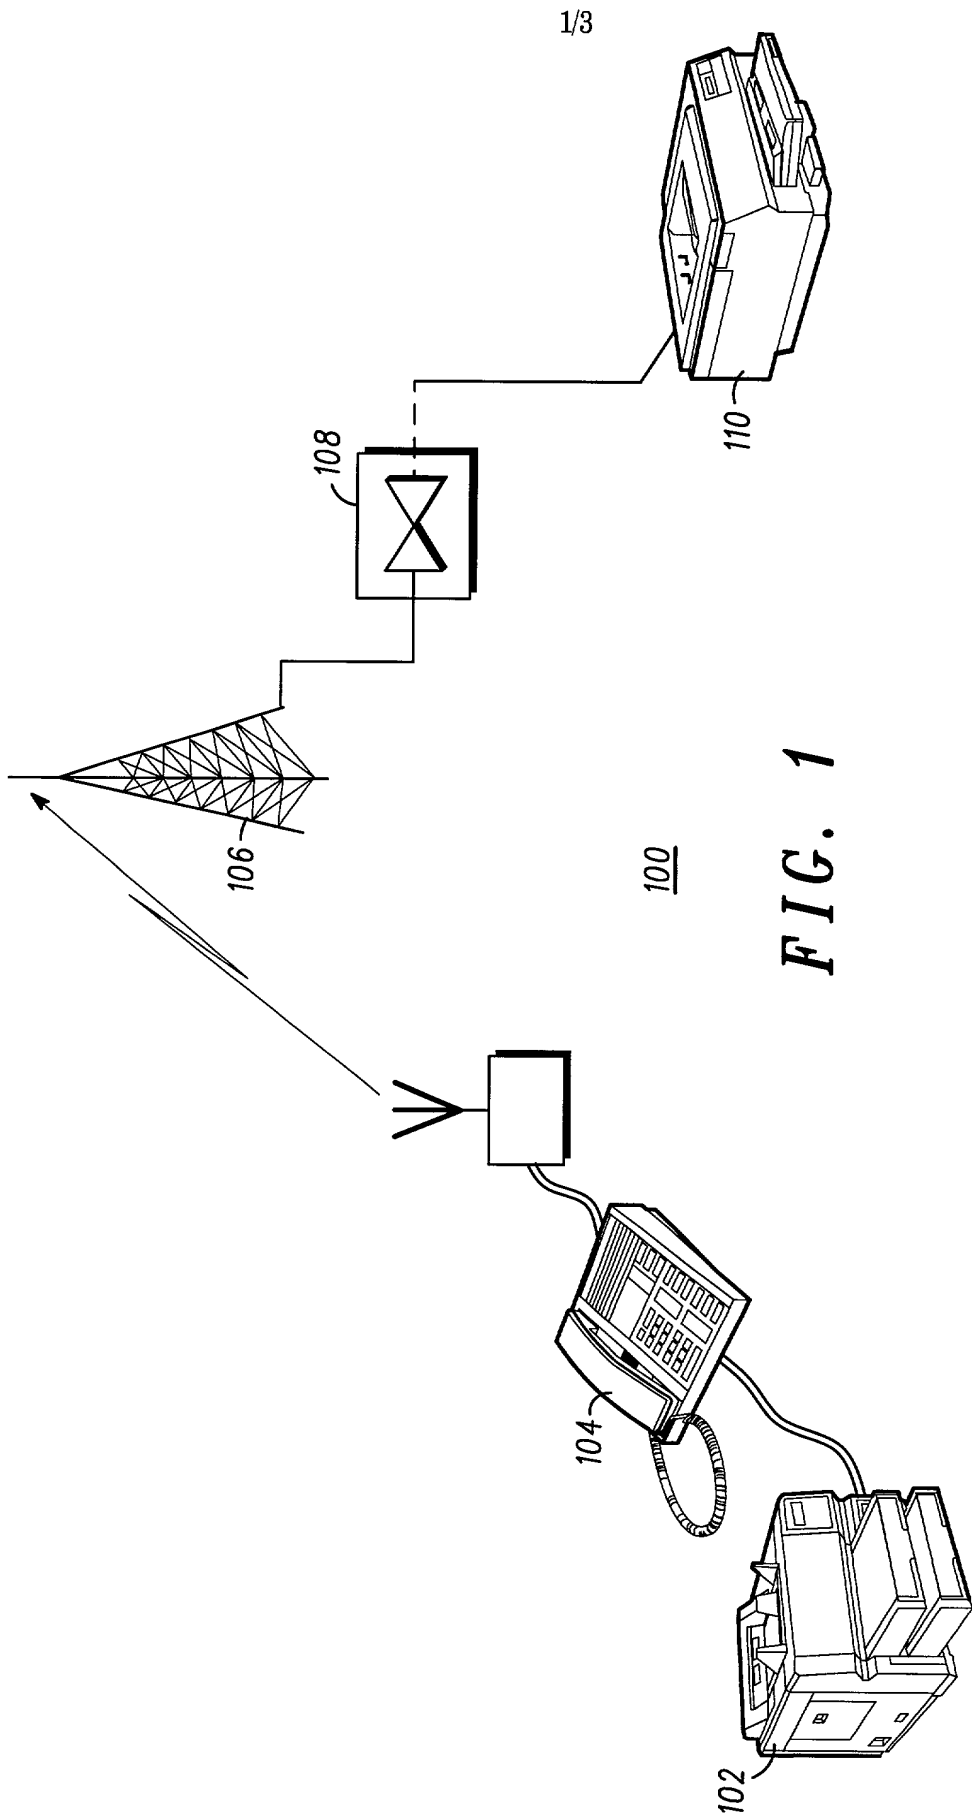

L


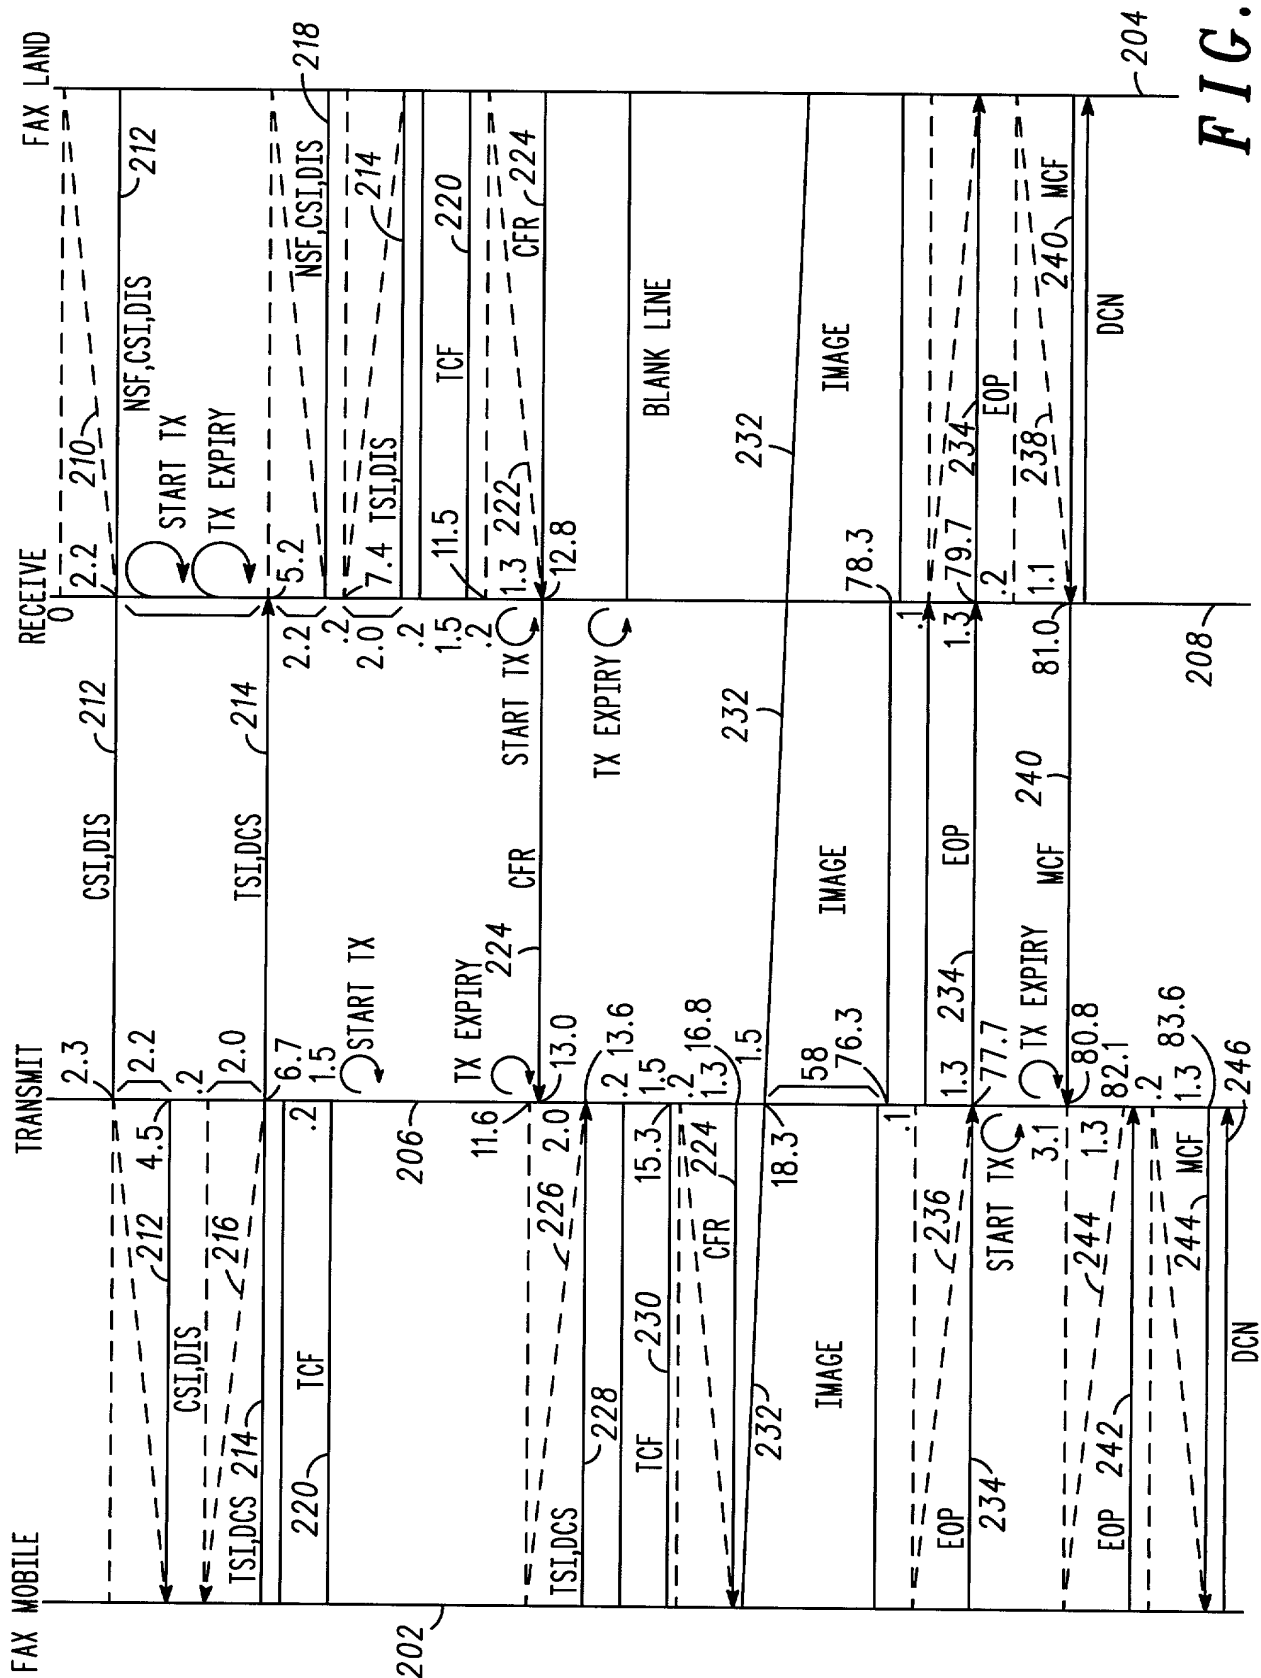


FIG. 2



PATENT APPLICATION DECLARATION
COMBINED WITH POWER OF ATTORNEY

Attorney's Docket No.: CE03978R

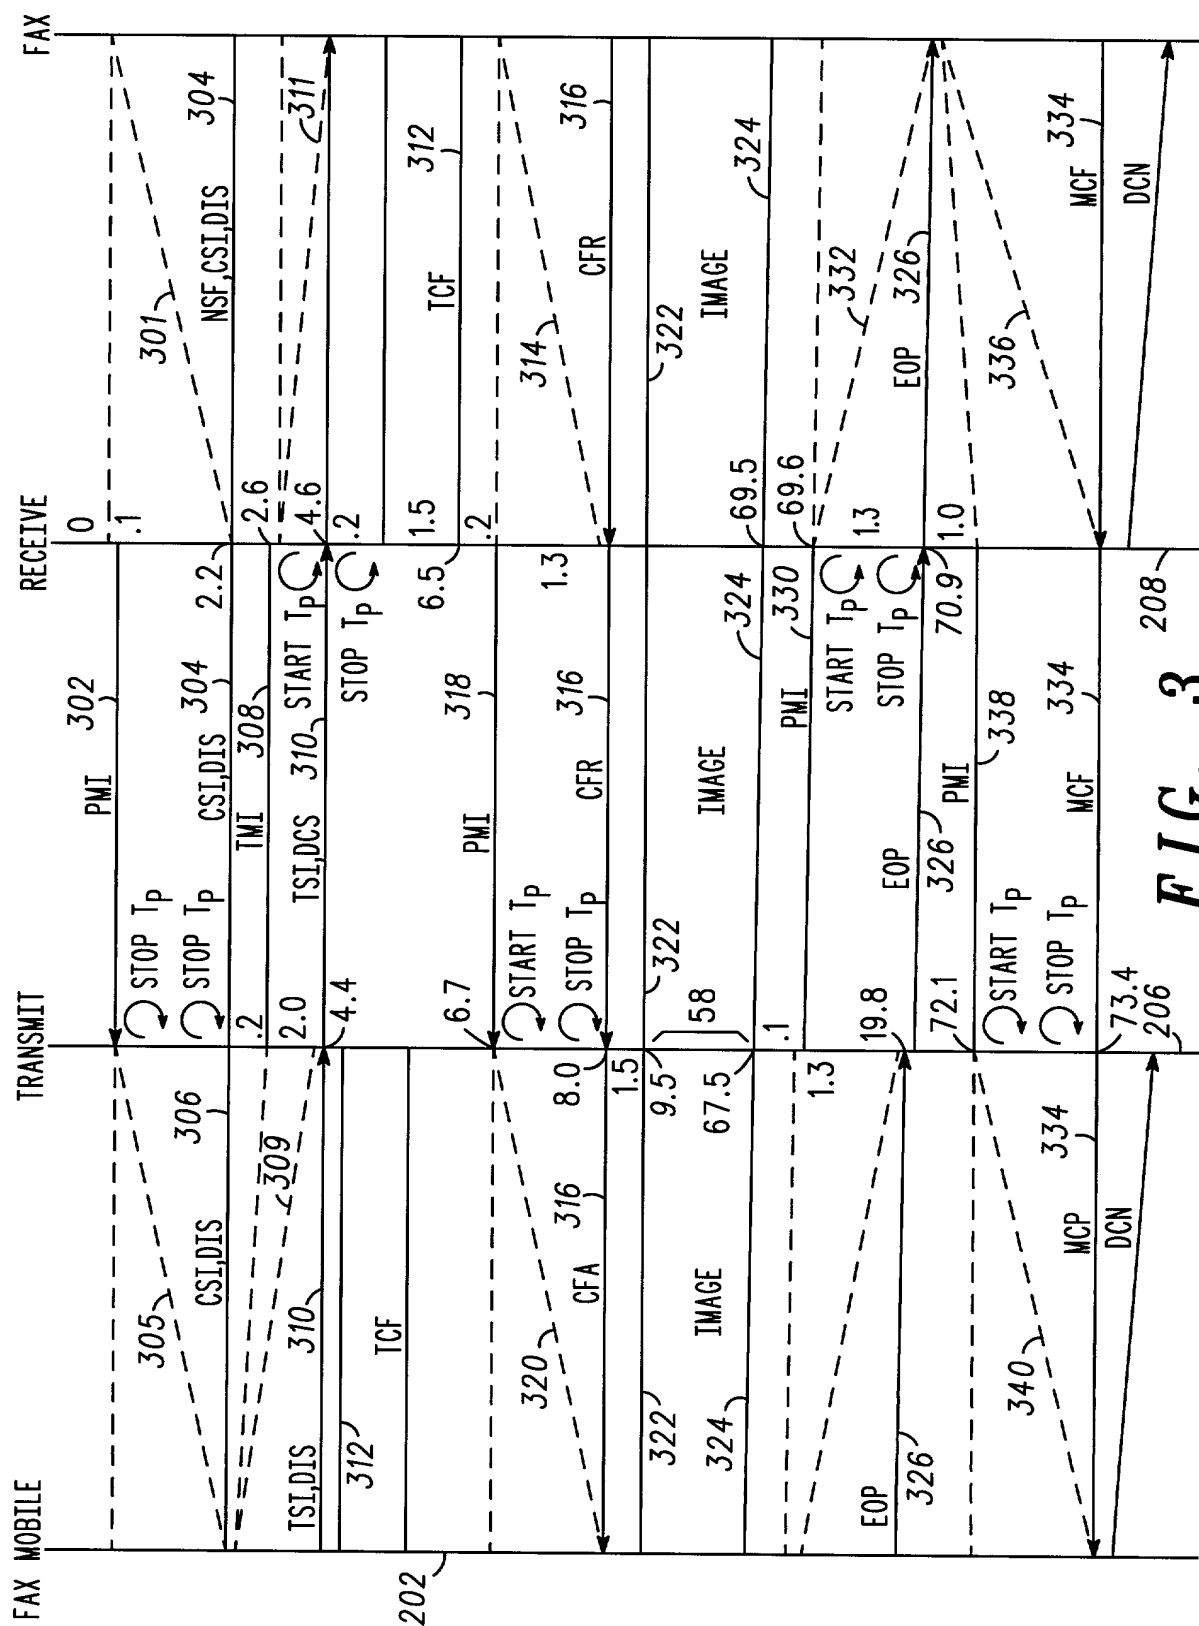

Regular (Utility)



Design Application

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

METHOD FOR REDUCING ANALOG FACSIMILE CALL DURATION OVER CDMA

the specification of which:



is attached hereto



was filed on: _____

as U.S. Serial No.: _____

and was amended on _____

(if applicable)

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the patentability of this application in accordance with 37 CFR § 1.56(a).

I hereby claim foreign priority benefits under 35 U.S.C. § 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate or 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or of any PCT international application having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s):



no such application(s) filed



such application(s) identified as follows:

Application Number	Country	Date of Filing (day, month, year)	Priority Claimed	
			<input type="checkbox"/> Yes	<input type="checkbox"/> No
			<input type="checkbox"/> Yes	<input type="checkbox"/> No

I hereby claim the benefit under 35 U.S.C. §119(e) of any United States provisional application(s) listed below:

Provisional Application Serial No.:

Provisional Application Filing Date:

I hereby claim the priority benefit under 35 USC §120 of any United States application(s), or 365(c) of any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 USC 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR §1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

Prior U.S. Application(s):



no such application(s) filed



such application(s) identified as follows:

U.S. Parent Application No. or PCT Parent No.	Filing Date (day, month, year)	Status (Patented, Pending, Abandoned)

AS A NAMED INVENTOR, I HEREBY APPOINT THE FOLLOWING REGISTERED ATTORNEY(S) OR AGENT(S) TO PROSECUTE THIS APPLICATION AND TO TRANSACT ALL BUSINESS IN THE PATENT AND TRADEMARK OFFICE CONNECTED THEREWITH:

CUSTOMER NUMBER 22917

Send correspondence to Customer Number **22917**

Address all telephone calls to:

Kenneth A. Haas at (847) 576-0379

Fax (847) 576-3750

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 USC and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of first-named or sole inventor <u>JANUSZ HYZIAK</u>		
Inventor's signature <u><i>Janusz Hyziak</i></u>	Date <u>9/11/2000</u>	
Residence <u>Des Plaines</u>	IL	
City	State or Foreign Country	
Citizenship <u>USA</u>	Country	
Post Office Address <u>9352 Margail</u>	Street Address	
<u>Des Plaines</u>	<u>IL</u>	<u>60016</u>
City	State or Country	Zip Code

Full name of second-named joint inventor <u>SAURABH RASTOGI</u>		
Inventor's signature <u><i>Saurabh Rastogi</i></u>	Date <u>08/10/2000</u>	
Residence <u>Patpar Ganj</u>	Delhi, India	
City	State or Foreign Country	
Citizenship <u>India</u>	Country	
Post Office Address <u>39 Ankur Apartments, 7</u>	Street Address	
<u>Patpar Ganj</u>	<u>Delhi, India</u>	<u>110092</u>
City	State or Country	Zip Code

Full name of third-named joint inventor <u>SCOTT FINKLE</u>		
Inventor's signature <u>Scott A. Finkle</u>	Date <u>7/11/2000</u>	
Residence <u>Hoffman Estates</u>	IL	
City	State or Foreign Country	
Citizenship <u>USA</u>	Country	
Post Office Address <u>1345 Meyer Road</u>	Street Address	
Hoffman Estates	IL	60194
City	State or Country	Zip Code